

Counter Intercom




Product description:

- ◆ It is applied in general environment, such as banks, postal services, business, insurance companies, stations, ticket offices, customs, hospitals and tax where is difficult to talk.
- ◆ Master unit with metal color appearance.
- ◆ Hands-free two-way intercom automatically.
- ◆ Microcomputer controlled circuit with squelch function, it can thoroughly solve echo and squeal problems.
- ◆ Adopting high-powered mic, voice is lifelike, loud and clear.
- ◆ Volume of master unit and extension can be adjusted separately, also the separate switch.
- ◆ Easy installation, only one wire for the master unit and extension connection.
- ◆ It can monitor the conversations of each window, providing clear and vivid voice, and the window without any perceived (for supervisor surveillance).
- ◆ With recorder jack, it can output double routes of sound signal (coordinate with the ATM, and other surveillance devices).

Operation instructions:

A. Instructions of the master unit:

- ① Microphone
- ② Volume button for the master unit
- ③ Volume button for the extension
- ④ Loudspeaker
- ⑤ Power light
- ⑥ Power switch (power)
- ⑦ Microphone jack (MIC)
- ⑧ Power supply jack (Power)
- ⑨ Jack for connecting extension (OUT)
- ⑩ Recording jack (REC)
- (1) Sensitivity of master unit microphone
- (12) Sensitivity of external microphone

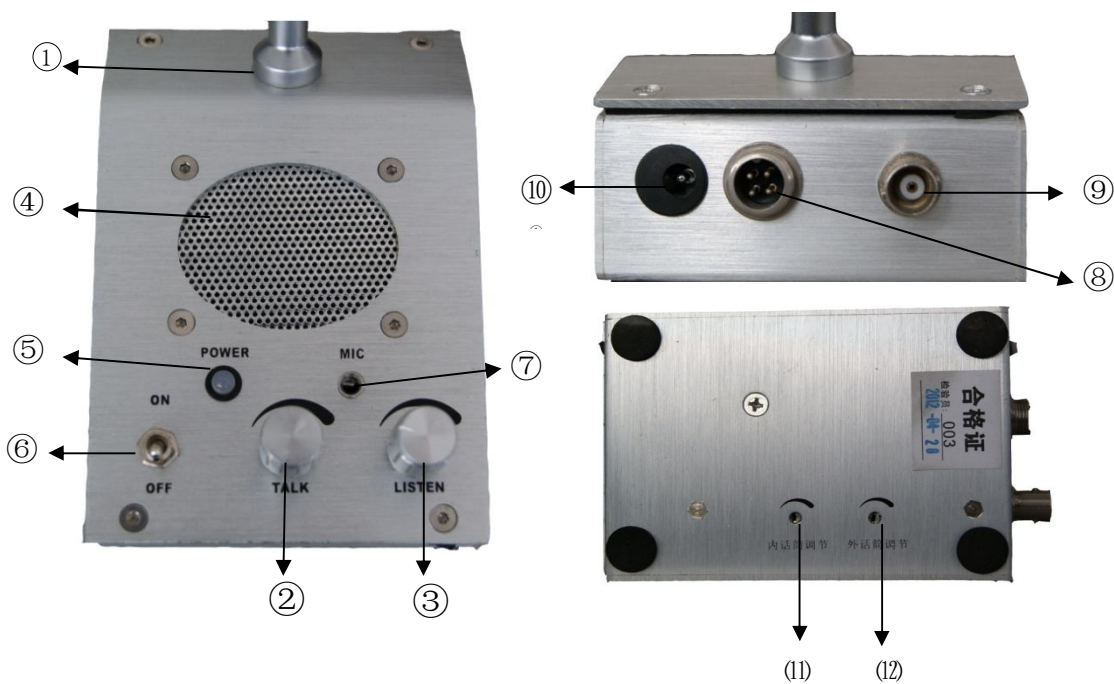

B. Basic configuration:

1. Master unit: 1pcs
2. Extension: 1pcs
3. PT (power transformer): 1pcs
4. Nylon wire: 4pcs
5. Installation fastener: 4pcs
6. User manual: 1pcs

C. Installation and usage

Installation methods:

1. Install the master unit at the workplace, and install the extension outside (stick on 30cm above the transfer), and then insert the connecting plug to the "Extension" jack of on the master unit.
2. Insert the transformer (DC12V) to the power supply (120V).
3. Open the power switch and the indicator light will be on.
4. Two-way intercom for the workplace.
5. If the sound of staff inside spreads out from the outside extension; sound of customer outside spreads out from the master unit inside, it means two-way intercom works properly.

Intercom functions:

1. Two-way intercom between the microphone on the master unit and the extension.
2. It can end the conversation between internal and external when turning the master unit or the extension volume to the lowest .That is one-way intercom.

Recording, monitoring, and interpose functions:

1. Insert the recording wires into the interface of recording and monitoring, then connect with the recording equipment, it can monitor the conversations of each window.
2. Insert the recording wires to the sound signal jack of the master unit and coordinate with ATM, monitoring equipment to recording sound.

D. Technical parameters:

1. Material: space aluminum shell
2. Specification: 120*84*43 MM (L*W*H)
3. Surface-Treatment Material: brushed and anodic oxidation treatment
4. Color: Silver, Panther Black, Champagne gold
5. Sensitivity mic: -47db±1db 20HZ—18KHZ
6. Working voltage: AC 110V—250V DC +12V
7. Working current: static state 25 mA peak: 100mA output power: 2W